
EASYCELL® Gel straight-through and branch joints



✓ simple + ✓ fast = EASYCELL[®]

Systems For Professionals

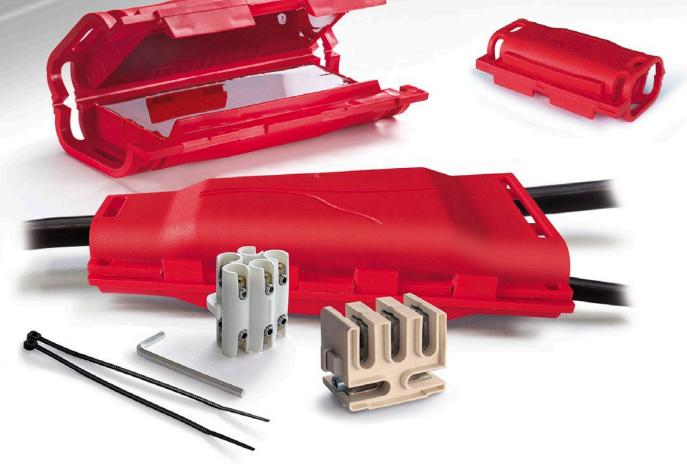

EASYCELL® straight-through and branch joints

The new EASYCELL® gel joint generation from Cellpack provides practical solutions for the connection and branch-off of low voltage cables up to 1 kV. Thereby, the generously dimensioned moulds with the sealing material, filled in and permanently soft elastic, together with the connection and branch-off blocks to be positioned precisely, guarantee for a safe electrical connection. As EASYCELL® will protect, insulate and seal instantly after closing, the connection is ready for immediate operation after being implemented.

Our product assortment includes 4 straight-through joints for cable sections ranging from 1.5 mm² up to 25 mm² as well as 2 branch joints for cable sections of 2.5 mm² up to 35 mm² on the main cable of 6 mm² up to 35 mm².

Product advantages

- no time-consuming mixing and filling
- no hardening time after the installation
- no special tools for the assembly required
- allows the opening of the joints for the modification of the connection
- indefinitely storable
- no hazardous goods labeling required
- not classified as hazardous waste when disposed

Application areas and properties

- for low voltage U₀/U (U_m) 0.6/1 (1.2) kV
- type-tested according to EN 50393 (compliance with IP68)
- for interior, outdoor, water and underground
- for plastic-insulated low voltage cables with
 3-, 4- and 5-core aluminium or copper conductors
- available as straight-through and branch joints
- shock-proof joint mould with 1-component dimensionally stable, silicone-based gel
- multi range one-piece connector/branch-off block, completely insulated
- holder integrated in the joint moulds for fixing the connector/branch-off block
- protected, insulated and enveloped directly on closing the gel joint
- no section of the main cable required with branch-off joints
- separate strain relief for the application with high mechanical loads and forces
- installation temperature up to -20 °C



The optimized design of the joint moulds and the dimensionally stable Cellpack gel guarantee a safe, permanent protection against the penetration of water and moisture. The high-quality packaging includes illustrated installation steps, in addition to all product core data. Completely insulated and cross-section range taking: The compact connector/ branch-off blocks are suitable for connections of up to five aluminium or copper conductors. Hex wrench and cable ties are also included in the scope of delivery.





Protection under high mechanical stresses. A strain-relief for straightthrough joints of 6 mm² up to 25 mm² (EASY 4 V and EASY 5 V) optionally available.



Universal application and efficient assembly

EASYCELL[®] allows the realization of safe cable connections in interior and outdoor areas as well as underground and under water. The simple and fast assembly of the straight-through and branch joints does not require any special tools such as a gas burner, for example. The electrical connection can be operated immediately upon the implementation as the gel remains soft elastic and thus does not require any hardening.



✓ simple + ✓ fast = EASYCELL[®]



The EASYCELL® product family

| Product | Application area Main cable Branch cable | | Dimensions L x W x H (mm) | Article Number |
|-------------------------|---|--|------------------------------|----------------|
| Straight through joints | | | | |
| EASY 2 V | 3 x 1,5 - 2,5 mm² | | 86 x 47 x 27 | 320436 |
| | | | | |
| EASY 3 V | 3 x 1,5 - 6 mm ² 4 x 1,5 - 6 mm ² 5 x 1,5 - 6 mm ² | | 145 x 50 x 40 | 309445 |
| EASY 4 V | 3 x 6 - 16 mm ² 4 x 6 - 16 mm ² 5 x 6 - 16 mm ² | | 180 x 69 x 40 | 309446 |
| EASY 5 V | 3 x 16 - 25 mm ² 4 x 16 - 25 mm ² 5 x 16 - 25 mm ² | | 240 x 75 x 44 | 309447 |
| Branch joints | | | | |
| EASY 6 V | 3 x 6 - 16 mm² 4 x 6 - 16 mm² 5 x 6 - 16 mm² | 3 x 2,5 - 16 mm² 4 x 2,5 - 16 mm² 5 x 2,5 - 16 mm² | 220 x 110 x 53 | 309448 |
| EASY 7 V | 3 x 16 - 35 mm ² 4 x 16 - 35 mm ² 5 x 16 - 35 mm ² | 3 x 2,5 - 35 mm ² 4 x 2,5 - 35 mm ² 5 x 2,5 - 35 mm ² | 260 x 130 x 65 | 309449 |
| Accessories for EASY 4 | V and EASY 5 V (optiona | l) | | |
| Strain-relief | 6 - 25 mm ² | | | 310553 |
| | | | | |

Further information on our products:

Cellpack GmbH | Carl-Zeiss-Straße 20 | 79761 Waldshut-Tiengen | Germany Tel.: +49 7741 6007-0 | Fax: +49 7741 64989 | Internet: electricalproducts.cellpack.com

